

Free Floating Guided Lever Drain Traps

For Loads to 42,000 lb/hr (19,050 kg/hr)...Pressures to 1,000 psig (69 bar)



Armstrong's forged steel, free floating guided lever drain traps use the same bodies, caps, lever mechanisms, valves and seats of Armstrong inverted bucket steam traps that have been proven in years of service. Elliptical floats and high leverage make it possible to open large orifices to provide adequate capacity for drain trap size and weight.

The hemispherical valve, seat and leverage of the 32-LD, 33-LD and 36-LD forged steel traps are identical in design, materials and workmanship to those for saturated steam service up to 1,000 psig (69 bar) with the exception of the addition of a guidepost to assure a positive, leaktight valve closing under all conditions.

List of Materials

Table LD-21.

Model No.	Valve & Seat	Leverage System	Float	Body & Cap	Gasket
32-LD				Forged Steel ASTM A105	Compressed, Asbestos-free
33-LD			Stainless Steel		
36-LD					

For information on special materials, consult the Armstrong Application Engineering Department.

For a fully detailed certified drawing, refer to CD #1035.

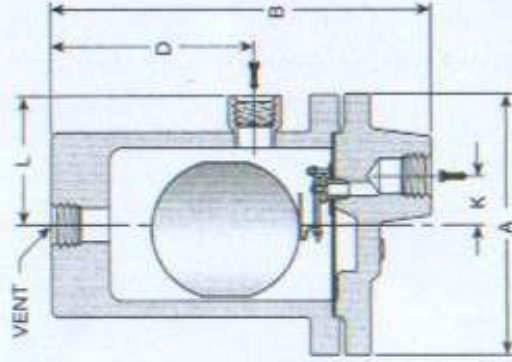


Figure LD-37.

No. 32-LD, 33-LD and 36-LD forged steel guided lever drain trap. Socketweld or flanged connections are also available.



Physical Data

Table LD-22. Armstrong Guided Lever Liquid Drain Traps

Model No.	Forged Steel				
	32-LD†		33-LD†		36-LD†
Pipe Connections	in	mm	in	mm	in
"A"	1/2, 3/4, 1	15, 20, 25	1/2, 3/4, 1	15, 20, 25	1-1/2, 2
"B"	6-3/4	171	8	203	11-7/8
"D"	10-3/16	259	11-9/16	294	17-1/8
"K"	5-9/16	141	6-1/16	154	9
"L"	1-1/4	32	1-7/16	37	2-1/8
Approx. Wt. (kg)	31 (14)		49 (22)		163 (74)
Max. Allowable Pressure (Vessel Design)	600 psig @ 100°F (41 bar @ 38°C) 500 psig @ 750°F (35 bar @ 400°C)		1,000 psig @ 100°F (69 bar @ 38°C) 600 psig @ 750°F (41 bar @ 400°C)		

Note: Vessel design pressure may exceed float collapse pressure in some cases.

Pipe size of vent connection is same as that of inlet and outlet connections.

†Applicable in Type 316 stainless steel. Consult factory.